




# Nozzle Clearing

Clearing the nozzle, which clears the garnet and other debris.

Written By: Dakshay Vishal Mehta

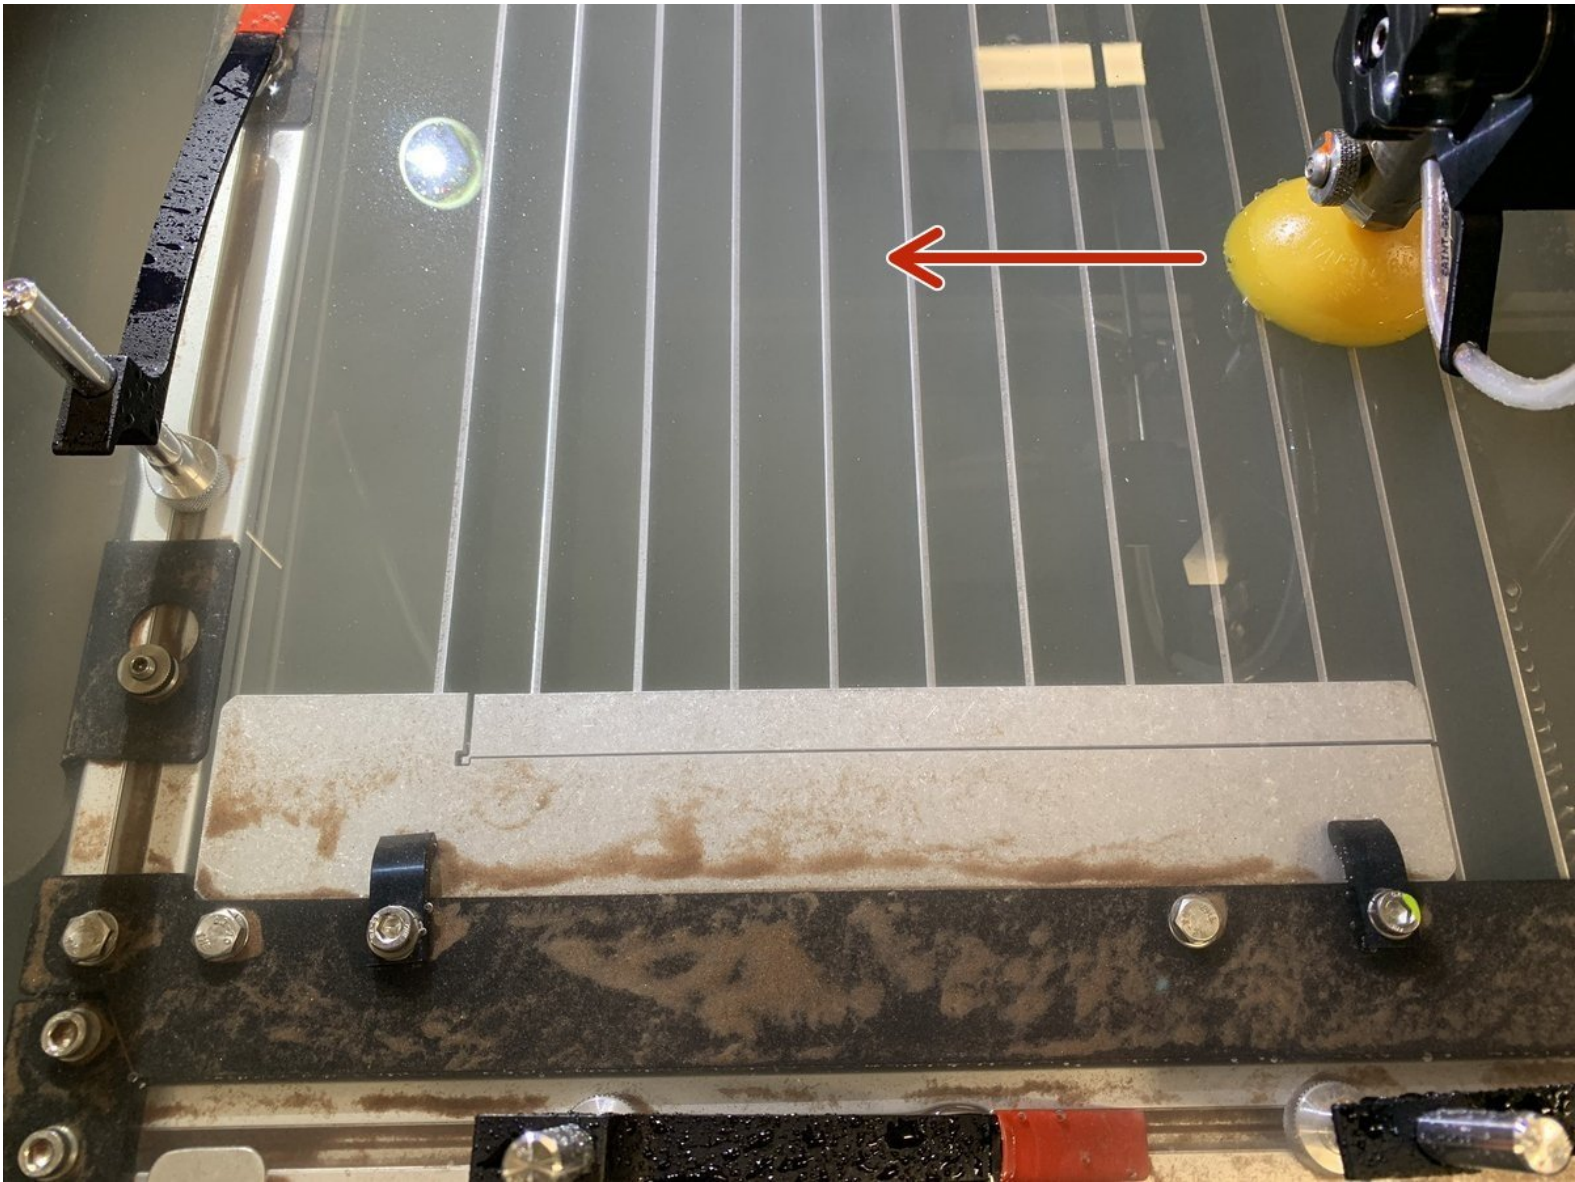


## Introduction

Another Resource to look at:


<https://knowledgebase.omax.com/protomax/...>

## Step 1 — Moving the Nozzle

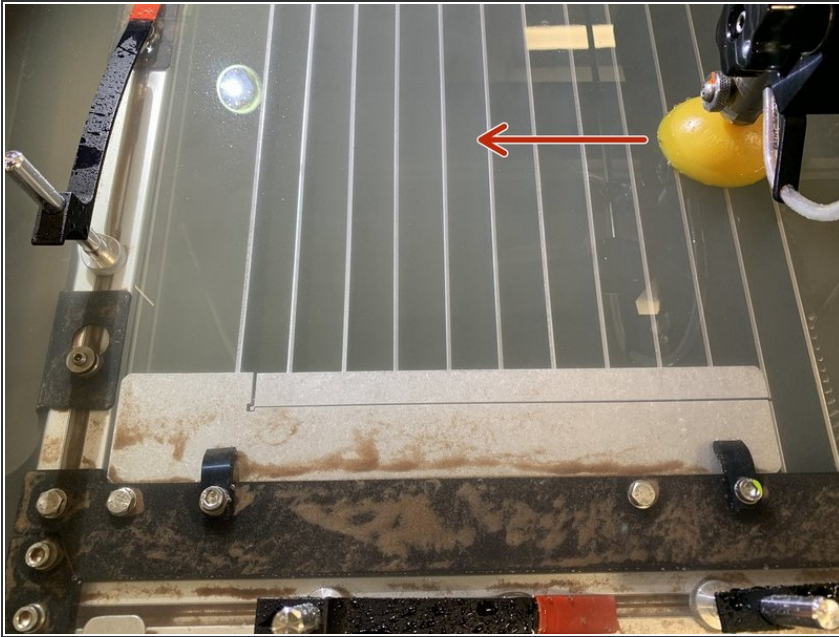

- Move the nozzle, so that there is nothing below it
- Ideally the nozzle should be between the metal slats, if installed
- If you need further information on the location. Please refer to the link in the description.


## Step 2 — Preparing the Nozzle

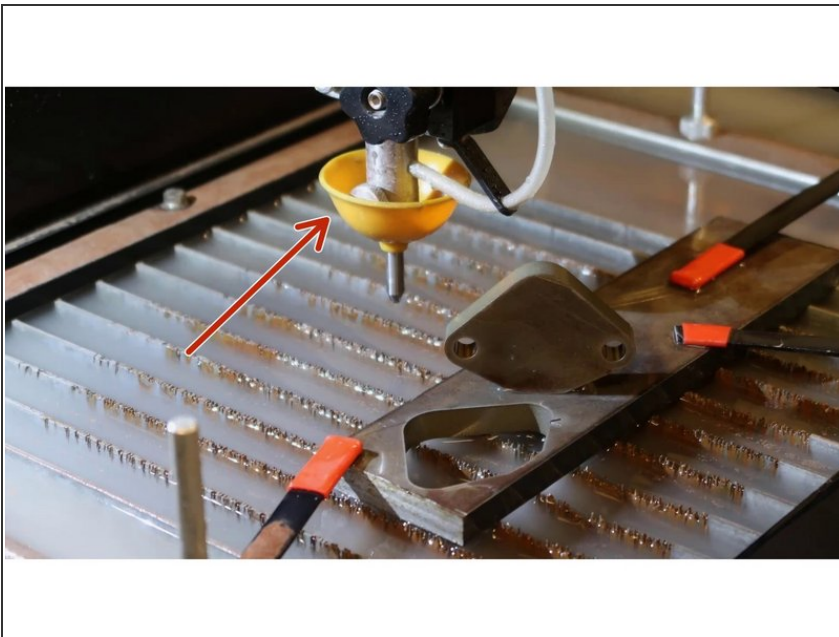

- Make sure the splash guard is up.

### Step 3 — Preparing the Nozzle (Part 2)

---

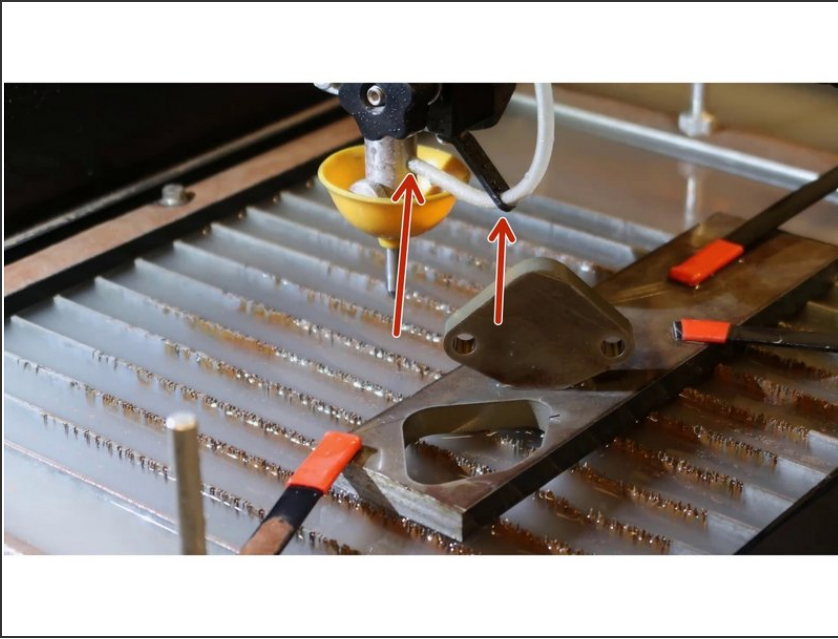

- Remove the garnet tube from the nozzle body.

### Step 4 — Getting ready


---



- Close the Water jet cover
- proceed to the application on the laptop.




## Step 5 — Navigating through the Protomax Software

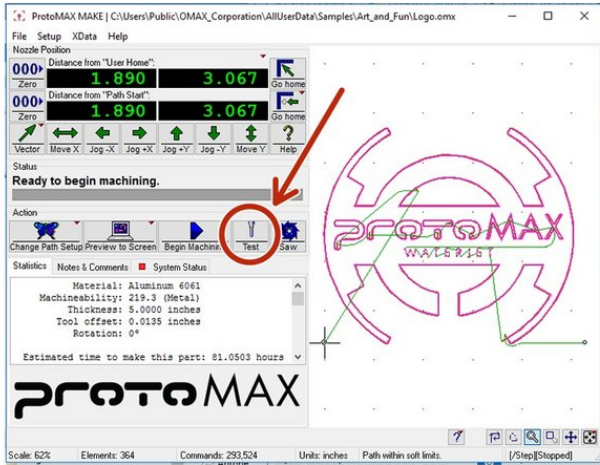

- Click the test button on the console/home screen

## Step 6 — Flush Plumbing

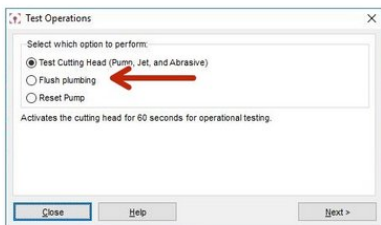

- Choose the "Flush Plumbing" option
- Continue to the next window

## Step 7 — Flush Plumbing Part-2



- Start the process, by hitting the button shown.
- Wait for about 10 seconds, for it to flush any garnet left in the nozzle.
- After 10 seconds, go ahead and cancel the process.