





Axis Belt Maintenance

Written By: Evan Hutzell

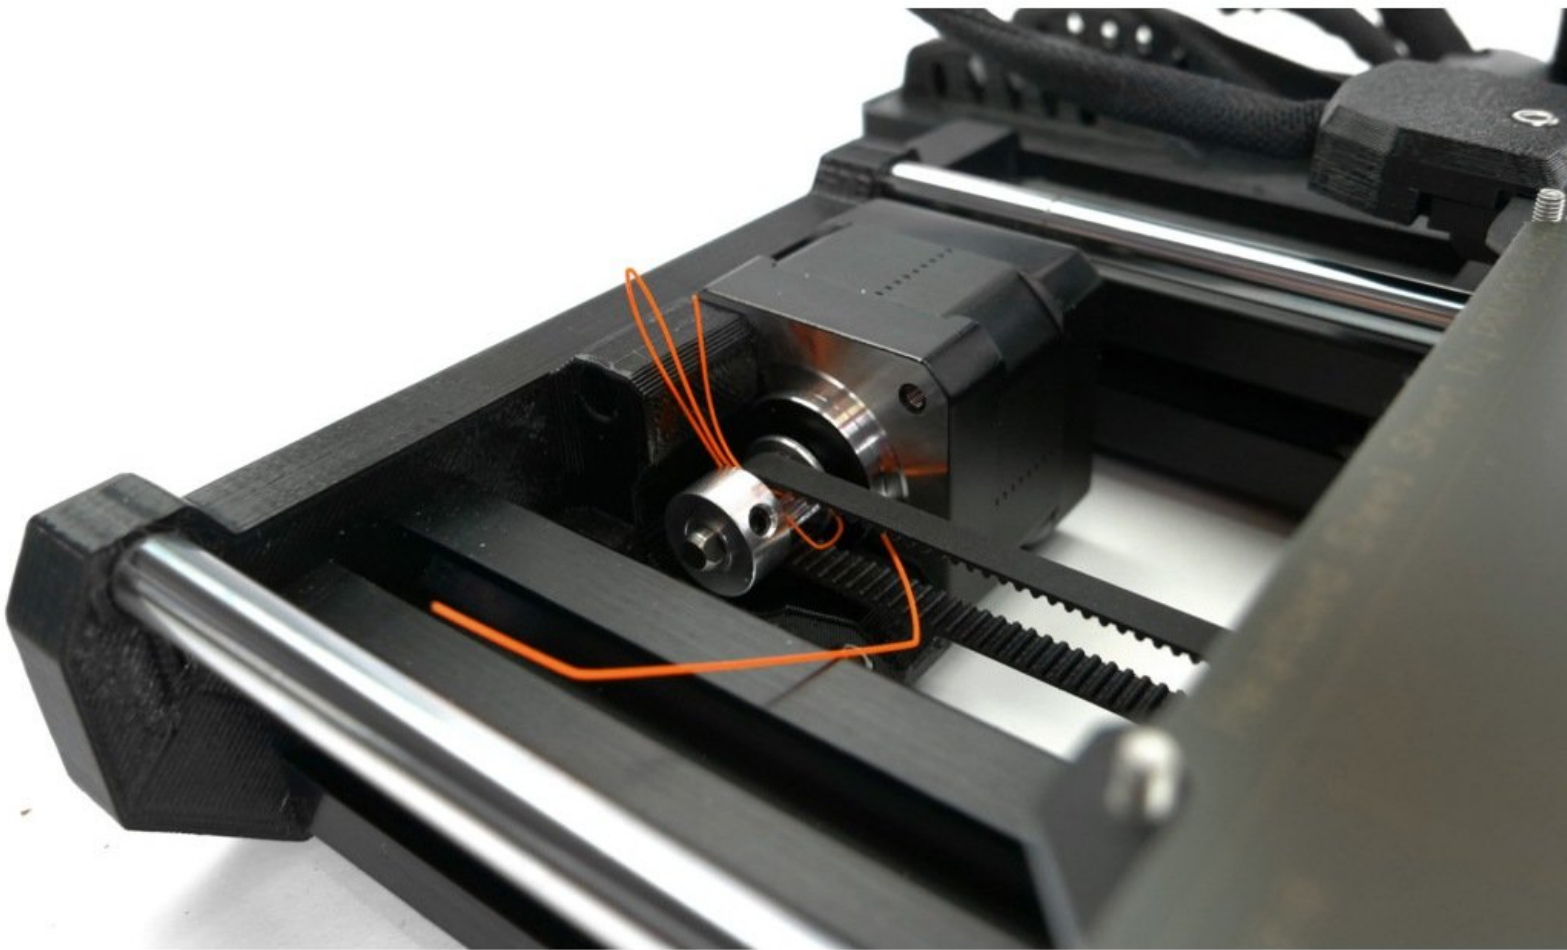

Step 1 — Clean debris from axis belts

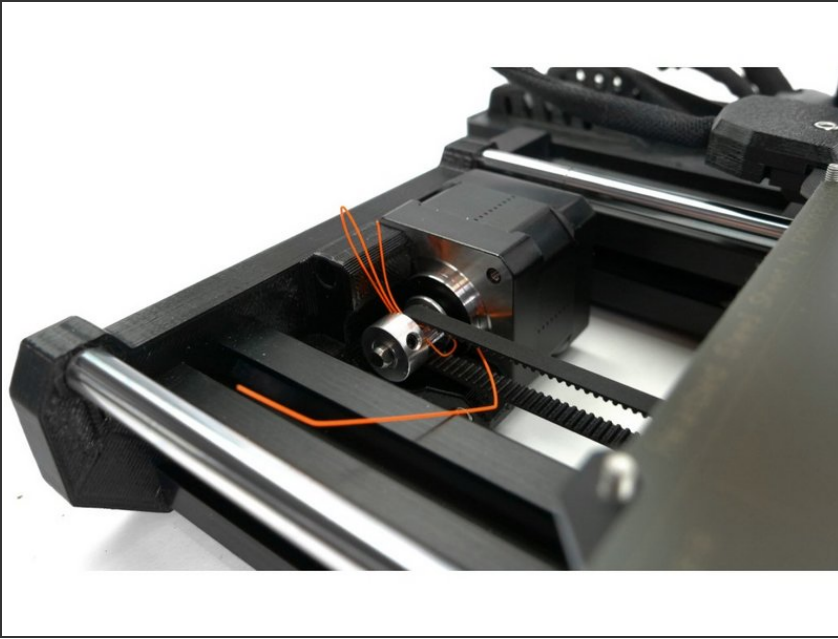

- Remove any debris from belts.
- Blow any small debris and dust off belts with compressed air.
- Check that the set screw of the belt pulley is firmly secured on the flat side of the motor shaft.

Step 2 — Adjust belt tension



- Refer to [Prusa's Guide](#) on adjusting belt tension.

Please remember to log this task when complete by

- Initialing the printer checklist, and
- Filling the printer maintenance google form. This can be accessed by scanning the QR code on either side or the room or by clicking this link [here!](#)